

*The Energy® AC-300
High Performance L/C/R*

Listen
closer.



Successor to the world famous RVS, the AC-300 is proof positive that the great can be made even better! The AC-300 offers higher sensitivity, increased power handling and lower distortion than its renowned predecessor did.

With its proprietary 1" (25mm) aluminum dome tweeter, the AC-300 speaker is the perfect center channel for the Energy® "Veritas", "Connoisseur" or "Audissey Bipolar" series'.

It's also ideal for use in an L/C/R configuration. Wider horizontal and vertical dispersion and

increased dynamics means broader, deeper sound staging with greater image precision. Driving the AC-300 is a simple task for quality electronics. Placement flexibility is also improved.

The AC-300 is a compact, elegant, structurally inert MDF enclosure with black high gloss lacquer end caps and acoustically transparent wraparound grille cloth. It's gold plated 5-way binding posts make it bi-amp or bi-wirable. The AC-300 from Energy. Stepping beyond high performance.


Listen closer. Audition the AC-300, today. You'll hear, and feel, the difference.

ENERGY
LOUDSPEAKERS
MUSICAL TRUTH™


Printed in Canada 3PEB028E

Features and Benefits

- Dedicated Center Channel for "Connoisseur™" and "Audissey™ Bipolar" series for the complete high performance home theater package.
- Proprietary ENERGY® 1" (25mm) tweeter, with ultra-light aluminum dome, cloth suspension and unique rear chamber that provides unparalleled dispersion, low distortion and fast decay time.
- Cast Spherex™ co-polymer woofer baskets are combined with Injection Molded polypropylene cones, that include mica and aluminum, for added stiffness and improved waveform properties.
- Compression molded high damping nitril butyl rubber surrounds assure fast transient response.
- Solid non-resonant MDF enclosure with Interloc™ bracing.
- Symmetrical and uniform crossover slopes.
- Low 1800Hz crossover point for excellent vertical and horizontal dispersion.
- Sculpted low diffraction baffle.
- Gold plated 5-way bi-amp/bi-wire binding posts.

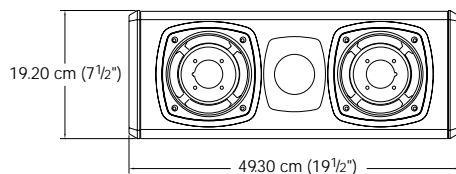

Front View

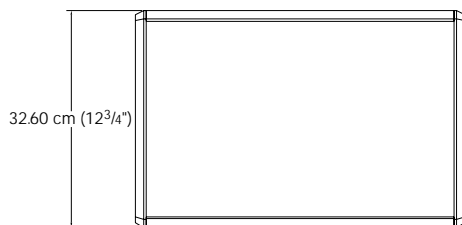

Top View

The Energy® AC-300

High Performance L/C/R

Dimensions and Specifications

System Type	Dual-vent (QB3) alignment d'Apolito driver configuration
Tweeter:	Magnetically shielded, ferro fluid cooled 1" (25mm) Aluminum Dome
Bass/Mid Drivers:	2 x 5 1/2" (14cm) magnetically shielded, with I.M. polypropylene cones, cast Spherex™ baskets, and rubber surrounds
Frequency Response:	On Axis +/- 3dB 40Hz- 22KHz
Efficiency:	90dB @ 1m/2.83v
Room Sensitivity:	93dB
Crossover Point:	1800Hz
Impedance:	6-ohms (Nominal) 4-ohms (Minimum)
Recommended Amp Power:	15- 175 watts RMS
Dimensions: (in) H x W x D (cm)	7 1/2 x 19 1/2 x 12 3/4 19.2 x 49.3 x 32.6
Weight:	23 lb 10.4 kg
Finish:	Black high gloss lacquer trim panels with wraparound acoustically transparent grille cloth

All measurements and specifications are subject to change without notice.